


SYSTEM 40® & 40®+ ROLLER SYSTEM WITH GUIDE WIRE

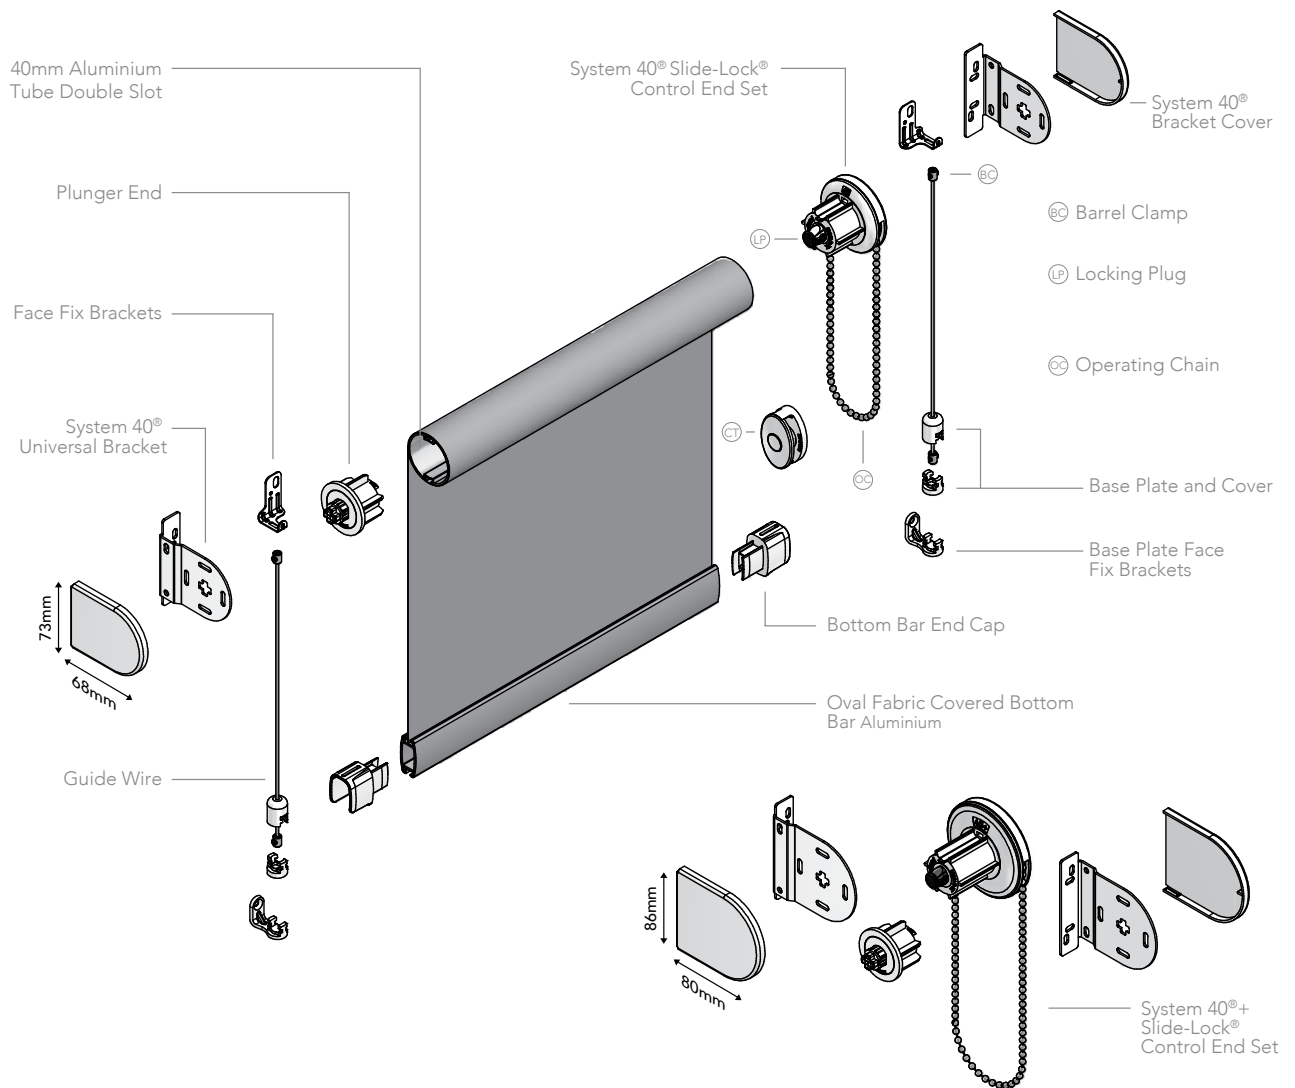

- Designed and manufactured in the UK, all systems are 10 year life cycle tested to ensure long lasting performance.
- The Guide Wire system holds fabric parallel to the window, keeping the blind taut during operation.
- The guide wire prevents movement of the blind from open windows and drafts.
- A stainless steel and nylon coated guide wire extends down each side of the blind, from the top fixing brackets to base plate brackets secured to the specific drop length of the blind into which the bottom bar secures.
- Slide-Lock® combines heavier holding weights with anti-fray features that ensure enhanced blind performance.
- Improved chain location for quick and easy on-site adjustment.
- Universal brackets and a spring idle end plunger enable easy and quick installation.
- Manufactured using high quality engineering grade polymer.
- Cassette and fascia options available.
- Can be used with the Easi-Lift™ spring